Wide Format Digital Imaging System



RICOH MP W6700SP



RICOH MP W6700SP

High functionality at a reasonable price, strongly support your business with excellent performance.

Monochrome wide format MFP, the RICOH MP W6700SP has excellent operability and scanner performance. High productivity given by newly developed controller and engine and high operability of documents provide efficient copy and release of drawing works even in small spaces. Moreover, the RICOH MP W6700SP has a full-color scanner function and a function to suppress the size of scan data. These functions provide manageable digitalized drawings. The RICOH MP W6700SP which has various functions like high-end machine is available at a reasonable price and will support your business.




USABILITY

Paper handling function allowing simple operations.

With internal paper ejection mechanism, the RICOH MP W6700 SP stacks papers to be printed and copied on a level. You can easily take them and work efficiently in front of the machine even in small spaces. In addition, You can choose between an optional Multi-Stacker or Double-Stacker, the RICOH MP W6700SP also stacks the large size drawings, which improves handleability of documents.



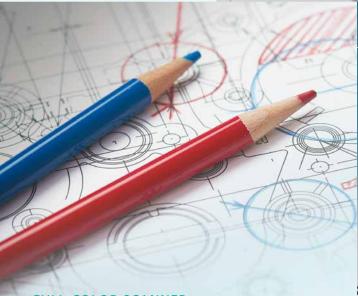

FULL-COLOR SCANNER

Enable high quality scan and digitize into manageable data.

Equipped with full-color scanner function as standard, the RICOH MP W6700SP has achieved a 600dpi high-quality full-color scan even in size A0. In addition, the RICOH MP W6700SP has some features such as resolution specification from 150dpi to 600dpi, high compression PDF creation, and scanner magnification change. You can digitize drawings and documents into various data sizes to your needs.

HIGH PRODUCTIVITY

Newly developed controller and engine provide high productivity.

- Continuous output speed *1 A0:3.7cpm, A1 horizontal:6.7cpm First copy time *2 A1 horizontal:17seconds Warm-up time *3 2 minutes



- *1 Continuous speed of second and subsequent sheets.
- *2 Time from the original reading start to the paper ejection completion. 1st roll feed, rear paper ejection.
- ${}^{*}3$ When the room temperature is 23 °C. The number depends on your environment and circumstances.

RICOH MP W6700SP composition of functions

Product name	СРМ		Plotter	Full-color	HDD	1 or 2 roll paper	Manual paper
	A0 vertical	A1 horizontal	function	scanner function	ПОО	feeder	feeder
RICOH MP W6700SP	3.7 cpm	6.7 cpm	Standard	Standard	Standard	Standard	Standard

RICOH MP W6700SP

MAIN SPECIFICATIONS

GENERAL

Technology: Electro-photographic printing

Fusing: Heat and pressure

Magnetic brush dual component dry toner Toner Type:

system

Print Speed: 3.3 ppm @A0/E SEF | 6.7 ppm @A1/D LEF

Print Resolution: RPCS (Emulation): 600 dpi PS3/PDF: 600/300 dpi

> RP-GL/GL2: 600/400 dpi RTIFF: 600/400/300/200 dpi

Warm-up time: Less than 120 seconds (23 degrees Celsius)

First Copy Time: 18 sec @ A1/D LEF (Roll Feeder)

Maximum Copy Size: (Metrics)

914 mm x 15,000 mm (Roll Feeder)

914 mm x 2,000 mm (Bypass)

(Inches)

36" x 590.55" (Roll Feeder) 36" x 70.74" (Bypass) 6.7 cpm / ppm @ A1/D LEF

Copy Speed: Minimum Copy size: (Metrics)

210 mm x 210 mm (Roll Feeder)

210 mm x 182 mm (Bypass)

(Inches)

8.27" x 8.27" (Roll Feeder) 8.27" x 7.17" (Bypass) 1250 × 755 × 1215 mm

230 kg Weight:

Power Source: 220V - 240V/ 8A 50/60Hz

Power Consumption: 1.84 Kw

SCANNER FEATURE

Dimensions (WxDxH):

Colour Scanner

Optical Resolution: Scan to email/folder: 150 / 200* / 300 / 400 /

600* dpi,

*Default for scan 200 dpi, for copy 600 dpi

Resolution: 150 to 2400 dpi (Copy)

150 to 1200 dpi (Scan)

Mono: Drawing mode (Default), Text mode, Scan Mode:

Text/Photo mode, Text/Drawing mode, Photo

mode. Grav scale

Color: Text/Photo mode, Photo

Mono: 80 mm/s (600 dpi) | Colour: 26.7 mm/s Scan Speed:

(600 dpi)

(Metric) 914.4 mm x 15,000 mm Maximum Scan Size: (Inches) 36" x 590.55"

(Metric) 210 mm x 210 mm Minimum Scan size (Inches) 8.27" x 8.27'

Protocol: Network: TCP/IP

Sending E-mail: SMTP AUTH, POP before SMTP

Scan to Folder: SMB, FTP, NCP

MEDIA HANDLING

Paper Feeding Capacity: 2 Roll Feeder (Standard):

Min Width: 210 mm

Max Width: 914 mm (Metric), 37.8" (Inches) Max Length: 150,000 mm (Matric), 590.55'

(Inches)

Max Diameter: Φ175 mm Bypass Feed (Standard): 1 sheet Paper Output Capacity: Inner: 99 sheets @ A1/D LEF (plain paper)

(Larger than A1/D size cannot be stacked), 10 sheets @ A1/D LEF (application paper) 1 sheet /

Rear: 10 sheets @ A1/D Portrait, A0/E SEF (plain paper) (Smaller than A2/C size cannot be stacked), 1sheet @ A1/D Portrait, A0/E SEF (application paper), 1sheet @ film

Paper Weight: Roll Paper: 51-134 a/m²

PRINT CONTROLLER SPECIFICATION

Configuration: Embedded Calpella (1.06 GHz) CPU:

Memory: 2.5 GB

HDD: 320 GB (Shared with Copy/Printer/ Scanner

applications) PS Driver

switching available

Operating System: Windows

> Vista/7/8/8.1/10/2003server/2008server/ 2008R2server/2012server/2012serverR2

Mac OS (later than Mac OS10.7) TCP/IP (IPv4, IPv6), IPX/SPX (option); Auto

Supported Print Language: PostScript Level3 (PDF), RPCS,

Emulation: HP-GL, HP-GL/ 2(HP-RTL), TIFF(CALS)

Font: (PS) European 136 fonts

Network Interface: Standard: Ethernet 10/100BaseTX Option: Wireless LAN (802.11a/b/g/n)

Interface Slot: Option Slot: 2 Slot

USB-Host Slot: USB 2.0 host

OTHER OPTIONS

Network Protocol:

Multi Stacker Type 7140 Double Stacker Type 7140 Original Tray Type G

Roll Paper Holder Unit Type A

Original Hanger

IEEE802.11a/g/n Interface Unit Type M2

ENVIRONMENTAL INFORMATION

Complies with Energy Star 1.1 standards. EPEAT 'GOLD'



www.ricoh-ap.com

RICOH ASIA PACIFIC PTE LTD

103 Penang Road #08-01/07, VISIONCREST Commercial, Singapore 238467

Phone: +65 6830 5888, Fax: +65 6830 5830